





GENERAL FEATURES

- **Long Service Life** - Thick plate design and efficient gas recombination yield a service life expectancy of up to 10 years in standby mode.
- **Low Internal Resistance** - Superb high-rate discharge characteristics ensure reliable performance in UPS and Telecom applications.
- **Maintenance-Free, Non-Spillable** - Proven VRLA technology guarantees safe operation without maintenance and 'non-restricted article' status for transportation.
- **Low Self-Discharge** - Lead-calcium alloy grids and use of high purity lead account for superior shelf-life characteristics permitting storage for extended periods of time.
- **Designed-In Reliability** - Cutting-edge manufacturing and process control combined with meticulous quality assurance procedures guarantee consistent and dependable performance

PERFORMANCE SPECIFICATIONS

Nominal Voltage	12V(6 cells)	
Design Floating Life @25°C	12 Years	
Nominal Capacity @25°C	20 hour rate	7.80Ah
	0.40A to 10.50V	
	10 hour rate	7.45Ah
	0.76A to 10.50V	
Internal Resistance	5 hour rate	6.50Ah
	1.36A to 10.20V	
	3 hour rate	6.32Ah
	2.14A to 9.90V	
Energy Density (20-hr. rate)	1 hour rate	5.40Ah
	5.50A to 9.60V	
Specific Energy (20-hr. rate)	Full Charged Battery@25°C	<25mΩ
		97.81W-h/l
Shelf Life (nominal capacity at 20°C)	1 Month	97%
	3 Months	91%
	6 Months	83%
Max.Discharge Current@25°C	7 Min.	24.0A
	Max Short-Duration Discharge Current	10 Sec
Standby Use Charge (Constant Voltage) @25°C	Initial Charging Current	Less than 2.34A
	Voltage	13.7 - 13.9V
Cycle Use Charge (Constant Voltage) @25°C	Initial Charging Current	Less than 2.34A
	Voltage	14.6 - 14.8V
Operating Temperature Range	Charge	0°C to 50°C
	Discharge	-20°C to 60°C

GENERAL FEATURES

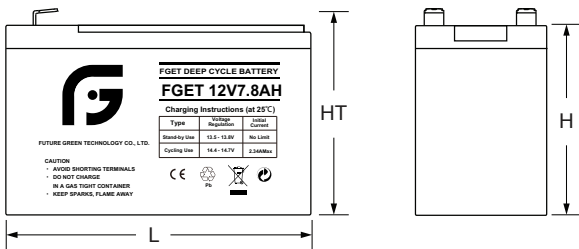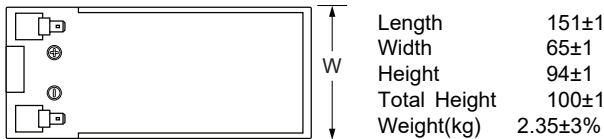


TERMINALS



mm

- F1 - Quick disconnect tabs, 0.187" x 0.032" - Mate with AMP. INC. FASTON "187" series

— OR —

- F2 - Quick disconnect tabs, 0.250" x 0.032" - Mate with AMP. INC FASTON "250" series



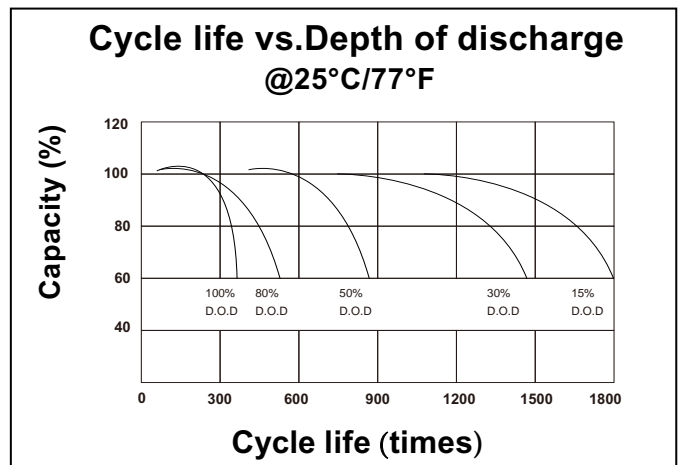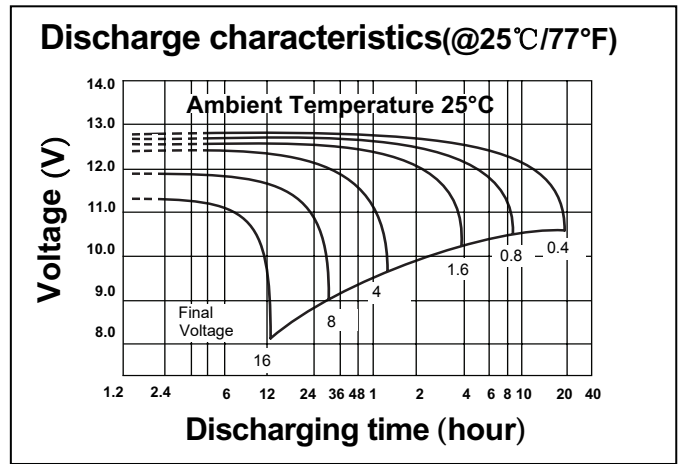

CONSTANT CURRENT DISCHARGE RATINGS (Amperes at 25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	31.72	20.69	15.26	8.832	5.103	3.011	2.189	1.743	1.471	0.983	0.801	0.417
10.0V	30.57	20.07	14.86	8.637	5.008	2.967	2.160	1.721	1.454	0.973	0.793	0.413
10.2V	29.08	19.26	14.33	8.381	4.883	2.908	2.121	1.692	1.432	0.960	0.783	0.409
10.5V	27.17	18.21	13.65	8.046	4.719	2.831	2.069	1.654	1.402	0.942	0.769	0.403
10.8V	24.75	16.88	12.77	7.611	4.504	2.729	2.002	1.604	1.362	0.919	0.752	0.395
11.1V	21.78	15.21	11.66	7.055	4.227	2.596	1.913	1.538	1.310	0.888	0.728	0.384